

COOL-LITE[®] XTREME ORAÉ[®]

Performance meets sustainability

The world's first low-carbon glass ORAÉ[®]
combined with the best in class coatings




COOL-LITE® XTREME ORAÉ®

The extremely selective solar control product family **COOL-LITE® XTREME** is available on **ORAÉ®** substrate, the first low-carbon glass.

With ORAÉ®, Saint-Gobain Glass has achieved a landmark technical breakthrough enabling it to offer a low embodied carbon glass on the façade market thanks to a substantial R&D effort and the excellence of our industrial teams. This innovation will help to significantly reduce the carbon footprint of construction and accelerate the development of the circular economy.

Intended for use in the glazed parts of a facade, COOL-LITE® XTREME ORAÉ® is a perfect response to the stricter sustainability requirements of the building industry without any compromise on technical or aesthetic performance.

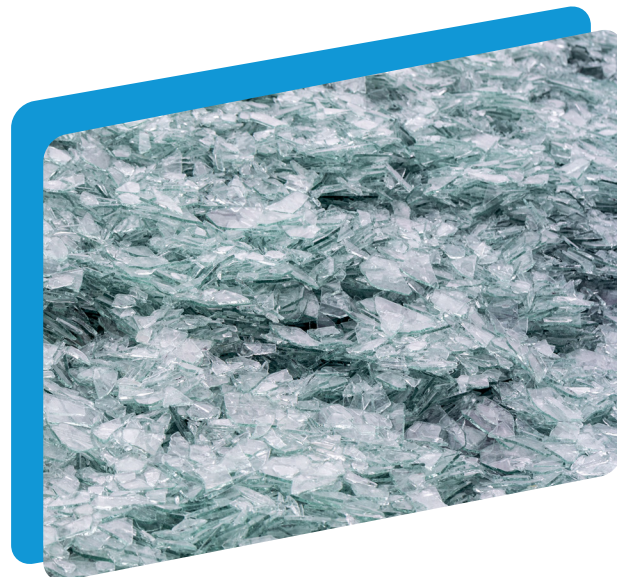

SUSTAINABILITY

COOL-LITE® XTREME ORAÉ® provides the best of both embodied and operational carbon levels, thanks to:

- The glass substrate ORAÉ®, with its low carbon footprint verified by an Environmental Product Declaration (EPD), produced by combining a very high recycled glass content (cullet) and renewable electricity.
- The excellent energy performances of the COOL-LITE® XTREME coatings, which already drastically reduce carbon emissions generated by energy consumption, when using the building thanks to its high performance in terms of daylight intake, solar control and thermal insulation.

PERFORMANCES

COOL-LITE® XTREME ORAÉ® provides the **same performances and quality** as COOL-LITE® XTREME PLANICLEAR®, with a much lower carbon footprint.



According to its verified EPD, the **ORAÉ®** substrate has a **carbon footprint of only 6.64 kg CO₂ eq./m²** (for a 4mm substrate), bringing a **reduction of 42%** compared to our European standard product PLANICLEAR®.

Coated, processed and assembled in insulated glazing unit, the reduction is then around 30% to 40%.

	Ug-Value ¹	Light Transmission (LT) ²	Solar Factor (g-value) ²	Selectivity (LT/g)	Outside reflection (LRe) ²	Inside reflection (LRI) ²	Carbon footprint (GWP) ^{3,4}	Carbon reduction vs. PLANICLEAR® ^{3,4}
	[W/m ² K]	[%]	[%]	[%]	[%]	[%]	[kg CO ₂ eq./m ²]	[%]
Standard build-up double glazing unit (DGU) 6/16/4 mm - coating on face 2, 90% Argon								
COOL-LITE® XTREME 70/33 ORAÉ®	1.0	70	33	2.12	11	13	24	-39%
COOL-LITE® XTREME 70/33 II ORAÉ®	1.0	70	33	2.12	11	13	28	-36%
COOL-LITE® XTREME 61/29 ORAÉ®	1.0	61	29	2.10	11	14	24	-39%
COOL-LITE® XTREME 61/29 II ORAÉ®	1.0	61	29	2.10	11	15	28	-36%
COOL-LITE® XTREME 51/23 ORAÉ®	1.0	51	23	2.22	13	18	24	-39%
COOL-LITE® XTREME 51/23 II ORAÉ®	1.0	51	23	2.22	13	18	28	-36%

¹ according to EN673

² according to EN410

³ Global Warming Potential (GWP A1-A3 Stages) values with PLANICLEAR® and ORAÉ® are calculations made with Calumen® for each composition of insulated glazing unit (IGU) on the basis of the standard EN 15804+A2. Detailed environmental data are documented in the available Environmental Product Declarations (EPD) of PLANICLEAR® and ORAÉ®. Only complete EPD can be verified by an external third party.

⁴ All panes of the DGU with the same substrate; first pane respectively annealed or tempered (II) with the same glass compositions; counter panes always annealed.


SAINT-GOBAIN

SAINT-GOBAIN GLASS

Saint-Gobain Tower
12 place de l'Iris
92400 • Courbevoie
France

glass.facade@saint-gobain.com
www.saint-gobain-glass.com



DISCOVER
AND TRY
CALUMEN®



CHECK OUR
EPD OF
ORAÉ® (4mm)



CHECK OUR
EPD OF COATED
ORAÉ® (6mm)

SAINT-GOBAIN GLASS

2023.12 - This document is regularly updated; information in this document is subject to change. Please check with your local sales and specification team. The mentioned trademarks are registered trademarks of Saint-Gobain Glass or affiliates, part of Saint-Gobain group.

Copyrights: ©REA_X.POPY ©Lasse Olsson Foto